



AJ GARDEN BOLLARD

This outdoor lamp emits a pleasant, fully shaded, downwardly directed, glare-free light. It is available in two different heights and has a fixed head. The inside of the shade is painted white to ensure a soft and pleasant reflection of light. The shape of the shade provides superior lighting, allowing an optimal view of its surroundings. The garden bollard can be fitted with three different installation types – namely a base plate, a spike, or an anchor.



Arne Jacobsen

Arne Jacobsen was born and raised in Copenhagen. In 1927, he graduated as an architect from the Royal Danish Academy of Fine Arts in Copenhagen. After graduating, he obtained his first job at the office of the City Architect of Copenhagen launching his own office only two years later.

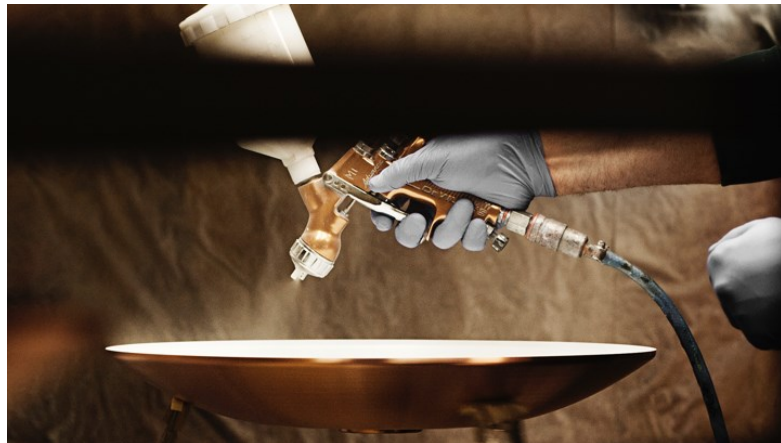

Product info

Information

The adapter is positioned externally from the fixture and can run up to 6 bollards. Maximum distance to last bollard is 30m. Spike: Plug and play. Let the enclosed cables run over the ground. Uses standard cables and connectors which are supplied. Anchor/Base: Requires certified electrician. Use installation tube for inground installation, with enclosed cables running inside, for legal fixed installation. LED replacement kit available. Replacement of the built-in LED requires a certified electrician.

Mounting

The bollard requires a separate, 24V DC power supply. Choice of 3 different mounting types. Spike mounted bollard: For use in soil or gravel; includes weather-proof cables and connectors for above-ground runs. Plug and play. Anchor mounted bollard: for casting in new concrete pad. Base mounted bollard: Includes baseplate for anchoring to decks and floors. Anchor or Base mounted bollards: installation determined by certified electrician with below ground cabling and conduit.

Finish

Outside: Black textured surface, powder-coated. Inside: White, wet-painted.

Materials

Head: Cast aluminum. Stem and base plate: Stainless steel. Spike: Cast aluminum with ABS housing. Anchor: Steel. Diffuser: Injection-molded opal PC.

Compliance

Ingress protection: IP 65. IK06

Light source

Lumen: 454


Information

The adapter is positioned externally from the fixture and can run up to 6 bollards. Maximum distance to last bollard is 30m.

Spike: Plug and play. Let the enclosed cables run over the ground. Uses standard cables and connectors which are supplied.

Anchor/Base: Requires certified electrician. Use installation tube for inground installation, with enclosed cables running inside, for legal fixed installation.

LED replacement kit available. Replacement of the built-in LED requires a certified electrician.

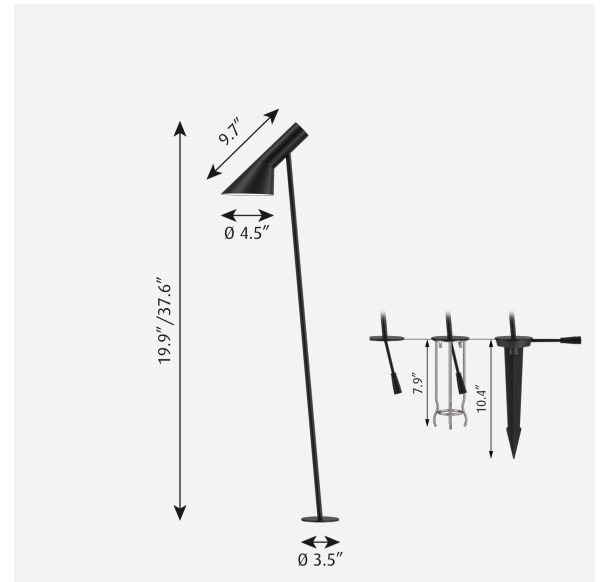

Related products



AJ Mini Table



AJ Royal




AJ Floor



AJ 50 Wall




AJ Table



AJ Wall



Product variants



Dimension	Mounting	Lumen
AJ Oxford Table Lamp LONG	Anchor w/o power supply	454
SHORT	Base w/o power supply	524
	Spike w/o power supply	

Design

Arne Jacobsen

Weight

Min: 0 lbs Max: 0 lbs

Dimensions

LONG, SHORT

Finish

Black texture

Spare parts & accessories

Product	Variant number
T-Connector for Spike-Mount Garden Bollards	5747405303
Power Supply for Base & Anchor Mount, 24VDC 100W 120-277V Input	10000158964
Power Supply with Cords for Spike Mount, 24VDC 100W 120V Input	10000158965
AJ GARDEN SPARE BASE SCREWS (4 PCS)	5747406218