


AJ ROYAL

The pendant comes in three sizes and is characterized by the ridges on top that allow a gentle light to exude upwards. In the new, energy-saving LED version, all three sizes come with a diffuser, which offers a smoother, 100% glare-free lighting.



Arne Jacobsen

Arne Jacobsen was born and raised in Copenhagen. In 1927, he graduated as an architect from the Royal Danish Academy of Fine Arts in Copenhagen. After graduating, he obtained his first job at the office of the City Architect of Copenhagen launching his own office only two years later.



Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Electrical: System Wattage: 8W or 30W LED Wattage: 7 W or 28 W Delivered lumens: 508 - 2,309 Efficacy: 63.5 lm/W - 77.0 lm/W Certifications: cULus, Damp Location Protection class IP20 Controllability: 0-10V Dimming Color Rendering: Ra≥90

Mounting

Cord type: 18 AWG braided fabric covered power cord. Cord length: 12'. Black canopy and cord for black pendant, white canopy and cord for white pendant.

Finish

White or black, wet painted.

Materials

Shades: Spun aluminum. Rings: Steel. Diffuser: Frosted acrylic.

Sizes and weight

Width x Height x Length (in.) | 14.6 x 6.5 x 14.6 Max 4.5 lbs | 19.7 x 8.8 x 19.7 Max 7.6 lbs

Compliance

cULus, Damp location.

Specification notes

a. 14.6 IN size available only in 16W. b. 19.7 IN size available only in 30W.

Light source


LED 2700K 16W
Lumen: 930

Information

Electrical:
System Wattage: 8W or 30W
LED Wattage: 7 W or 28 W
Delivered lumens: 508 - 2,309
Efficacy: 63.5 lm/W - 77.0 lm/W
Certifications:
cULus, Damp Location
Protection class IP20
Controllability: 0-10V Dimming
Color Rendering: Ra≥90



Related products



AJ Mini Table




AJ Floor



AJ 50 Wall



AJ Table



AJ Wall



AJ Garden Bollard



Product variants

Dimension	Color	Cable type	Light source	Lumen	Voltage frequency
AJ Oxford Table Lamp 14.6 IN	AJ Mini Anniversary Edition ● Black	Black fabric cord and wire	LED 2700K 16W	1100	120-277V/60HZ
19.7 IN	○ White	White fabric cord and wire	LED 2700K 30W	1125	
			LED 3000K 16W	1898	
			LED 3000K 30W	1955	
				2242	
				2309	
				930	
				951	

Product description

The AJ Royal is an icon that follows his overall geometric shape concept. The spherical dome shape is simple yet complex. The circular ringed louvers on top provides a glow while still maintaining its overall domed shape. These ridges allows a gentle light to exude upwards, while the custom LED boards provide a glare-free lensed downlight. The fixture is available in 3 different sizes: 9.8", 14.6", 19.7" diameters. The dome-shaped pendant comes in three sizes and is characterized by the ridges on top that allow a gentle light to exude upwards.

Mounting

Mounts onto a 4 inch octagonal outlet box. Includes a single stainless steel aircraft wire to support the weight. Canopy: Black or white to match pendant finish, contoured cone profile, 9.4 IN diameter x 7.6 IN tall. Electronic driver for 120-277V power supply housed inside canopy. Cord type: 2-conductor, 18 AWG white or black PVC power cord. Cord length: 12 feet.

Light description

A downward light is diffused by the bottom opal white diffuser with upward accent illumination through the open rings at the top of the shade. Standard CCT in 2700K or 3000K, controlled by electronic driver.

Design

Arne Jacobsen

Material

Shade and canopy: spun aluminum, 0.08 in thick. Black or white wet painted finish to match pendant finish. Cable: black or white fabric covered, 3-conductor, 18 AWG cord, 12 foot length. Standard finish are matte surface powder coat with minimum 2 mils thickness in black or white. White or black, wet painted.

Weight

Min: 4.515 lbs Max: 7.63 lbs

Dimensions

14.6 IN, 19.7 IN

Other functions

Longer cord lengths. Custom finishes. LED in 2700K or 3500K. Alternative dimming controls.

Finish


Black, White

Voltage


120-277V/60HZ

Light distribution diagrams

Cartesian

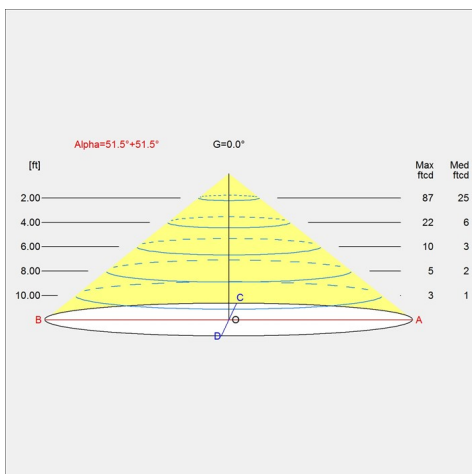

Isolux

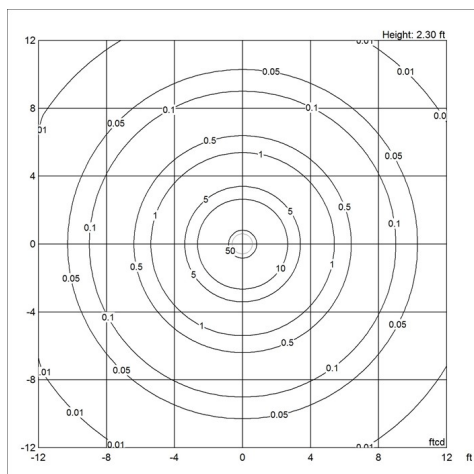

Polar

