

TOLDBOD 6.1/8.7 GLASS PENDANT

The fixture emits glare-free light directed primarily downwards. The opal glass provides a comfortable and uniform illumination of the area around the fixture.



Greek Restaurant Spyro's

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Electrical: System Wattage: 5W or 22W LED Wattage: 5 W or 20 W Delivered lumens: 189 - 436 Efficacy: 37.8 lm/W - 19.8 lm/W Certifications: cULus, Dry Location Protection class IP20 Controllability: Phase dimming Actual performance dependent upon screw-base lamp used.

Mounting

Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Finish

White opal glass.

Materials

Suspension: Brushed stainless steel. Shade: Handblown white opal glass.

Sizes and weight

Width x Height x Length (in.) | 6.1 x 10.4 x 6.1 Max 1.8 lbs | 8.7 x 15.1 x 8.7 Max 3.4 lbs

Compliance

cULus, Dry location.

Specification notes

a. 6.1 IN available only in 1/10W/G16.5. b. 8.7 IN available only in 22W LED/A-21.

Light source

1x10W G16.5/IF Candelabra US

Information

Electrical:

System Wattage: 5W or 22W

LED Wattage: 5 W or 20 W

Delivered lumens: 189 - 436

Efficacy: 37.8 lm/W - 19.8 lm/W

Certifications:

cULus, Dry Location

Protection class IP20

Controllability: Phase dimming


Actual performance dependent upon screw-base lamp used.




Related products




Toldbod 11.4 Post



Toldbod 6.1 Wall



Toldbod Pendant



Product variants

| Dimension | Light source | Voltage frequency |
|-------------------------------|------------------------------|-------------------|
| Toldbod 6.1 Bollard 6.1 IN | 1x10W G16.5/IF Candelabra US | 120V |
| 8.7 IN | 1x22W A-21/medium | |

Product description

Toldbod pendant is designed based on the PH Ellipse reflector is simple and elegant. The Toldbod Glass Pendant is an opal white glass pendant with brushed stainless-steel stem. The glass shade is handblown with three layers of clear and white glass for halo-like effect along the edges. As with other Toldbod products, the design is based on the PH Ellipse reflector. The glass shade is supported with an aluminum housing. Available in two sizes-6.1" and 8.7". The Toldbod family includes aluminum pendants of various sizes: 4.7", 6.7", 9.8", 15.7" and 21.7"; and many colors. Additional choices include wall mount, exterior bollard and post mounted area light.

Mounting

Mounts onto a 4 inch octagonal outlet box. Canopy: White, flat cone profile, 5.3 IN diameter x 1 IN tall. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12 feet.

Light description

The fixture emits spherical, diffuse light and the thickness of the glass results in very comfortable light distribution. Provided with a socket allowing the use of various color temperatures or wirelessly-controlled lamps as desired.

Design

Louis Poulsen A/S

Material

Glass shade is three-layered, glossy, opal white, handblown glass 0. 2 IN thick. Stem and glass cap are brushed stainless steel. Canopy is spun aluminum, 0. 03 IN thick. Socket: Porcelain, medium base for A-19 size or candelabra base G16. 5 lamps.

Weight

Min: 1.845 lbs Max: 3.382 lbs

Dimensions

6.1 IN, 8.7 IN

Other functions

Longer cord lengths.

Finish


White opal glass

Voltage


120V

Light distribution diagrams


Cartesian

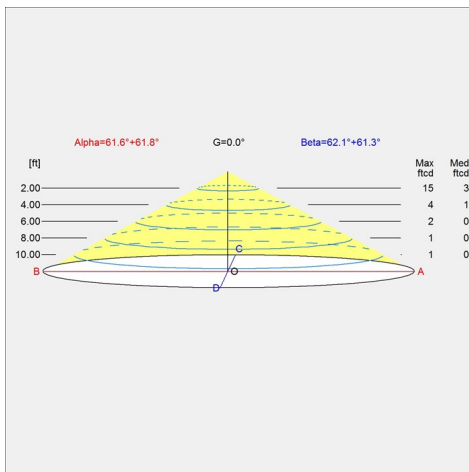

Isolux

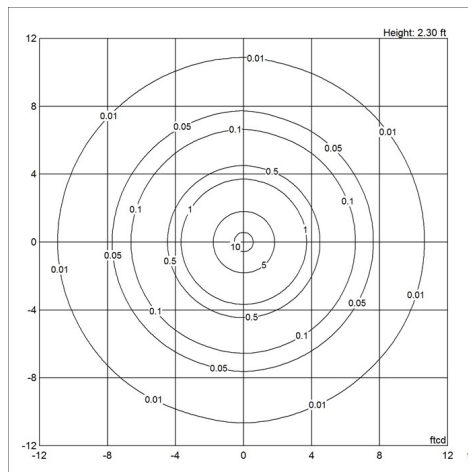

Polar

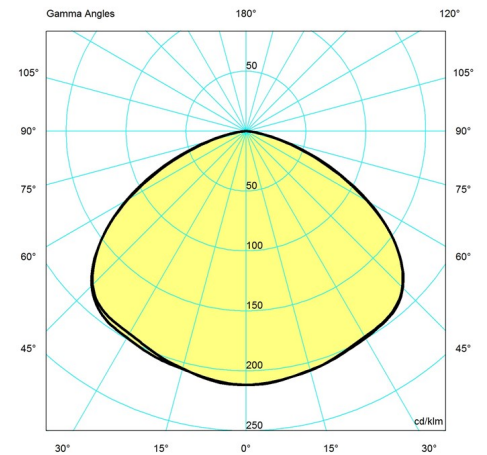

Spare parts & accessories

Toldbod 6.1/8.7 Glass Pendant

| Product | Variant number |
|------------------------------|----------------|
| Canopy White 2-part tophat ® | 5749329034 |
| Small canopy, white | S0771 |
| Small canopy, black | 10000018378 |
| Toldbod Pendant 155 glass | 5741085907 |
| Toldbod Pendant 22 glass | 5741085910 |