


TOLDBOD 6.1 BOLLARD

The light is directed 100% downwards and the shade has a matte white painted interior emitting a soft, diffused, comfortable light.



Skagen

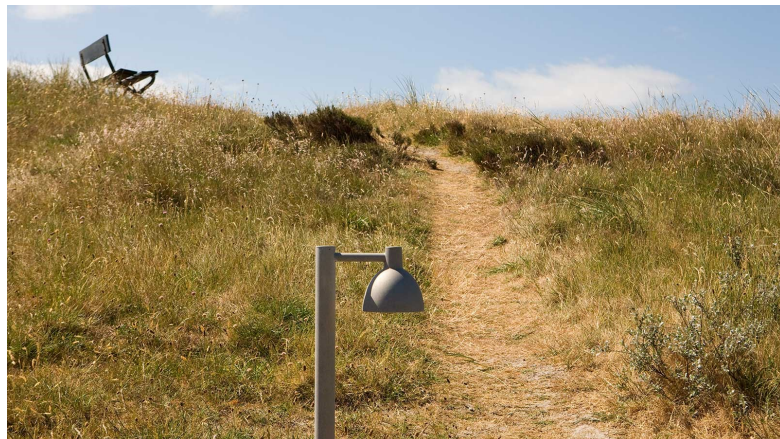

Henne Mølle Å Badehotel

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Electrical: Maximum Lamp Wattage: 60W Delivered lumens: 661 lm Efficacy: 3.0 lm/W Certifications: cULus, Wet Location Protection class IP44 IK class 05 BUG Rating: B0-U1-G0 Controllability: Phase dimming.

Mounting

Base plate dimension: 6" diameter. Base plate: Mounted to a concrete base with 3 anchor bolts on a bolt circle of 3.54" diameter. Installation: Refer to mounting instruction download for installation details.

Finish

Black, powder coated.

Materials

Shield: Tempered sand blasted glass. Luminaire head: Die cast aluminum. Post: Extruded aluminum. Base plate: Aluminum.

Sizes and weight

Width x Height x Length (in.) | 6.1 x 35.4 x 10.5 Max 5.0 lbs

Compliance

cULus, Wet location.

Information

Electrical:
Maximum Lamp Wattage: 60W
Delivered lumens: 661 lm
Efficacy: 3.0 lm/W
Certifications:
cULus, Wet Location
Protection class IP44
IK class 05
BUG Rating: B0-U1-G0
Controllability: Phase dimming.


Related products



Toldbod 11.4 Post




Toldbod 6.1 Wall



Toldbod Pendant



Toldbod 6.1/8.7 Glass
Pendant

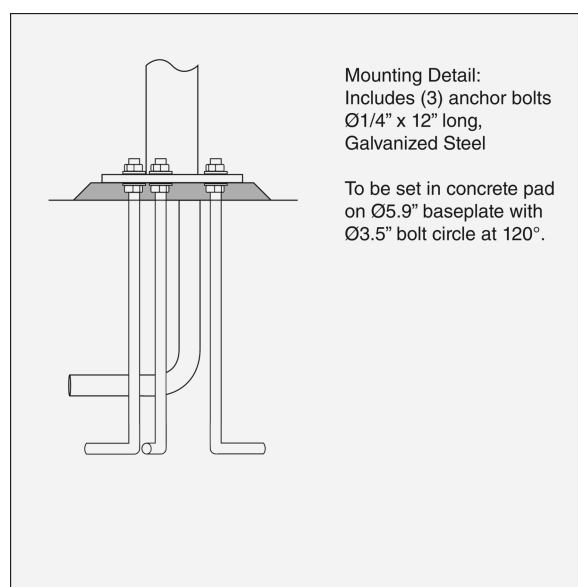

Product variants

Light source	Voltage frequency	Class	Pole type
-	120V	-	-
1x40W G16.5/IF Candelabra US		I	POST W/BASE PLATE

Product description

Side mounted shade type bollard based on PH ellipse reflector. Mounted on round stem/pole on cantilevered arm. Bollard provide glare-free pathway illumination. Ideal for garden and residential application. Available in a textured black finish. Toldbod family has various sizes of interior pendant and wall mounted fixtures, and exterior post tops.

Mounting

Base plate dimension: 6" diameter. Base plate: Mounted to a concrete base with 3 anchor bolts on a bolt circle of 3.54" diameter. Anchor bolts to be embedded into a concrete foundation by others. Overall height: 35.4 inches.

Light description

The light is directed 100% downwards and the shade has a matte white painted interior emitting a soft, diffused, comfortable light from a candelabra screw-base lamp (by others). The clear polycarbonate lens extends below the housing, creating a horizontal edge-lit accent. Features pleasant lighting comfort.

Design

Louis Poulsen A/S

Material

Shield: Tempered, sand blasted glass. Luminaire head: Die cast aluminum. Post: Extruded aluminum. Base plate: Aluminum. Anchor bolts: Hot-dipped galvanized steel. Standard finish is matte, textured surface powder coat with minimum 2 mils thickness in black.

Weight

Min: 4.963 lbs Max: 5.441 lbs

Other functions

Custom finishes. Custom pole heights. Use with an amber LED lamp for sea turtle nesting areas.

Finish

Black texture

Voltage

120V

Spare parts & accessories

Product

PH3-2½ BOL./TOLDBOD BOL.EARTH ANCHOR NEW

Variant number

5747293696